



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>D06M 15/643, 23/06, G01N 33/36, 3/00</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 96/15310</b> <b>(43) International Publication Date:</b> 23 May 1996 (23.05.96)
<b>(21) International Application Number:</b> PCT/US95/14033 <b>(22) International Filing Date:</b> 31 October 1995 (31.10.95)  <b>(30) Priority Data:</b> 08/338,314 10 November 1994 (10.11.94) US  <b>(71) Applicant:</b> THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).  <b>(72) Inventors:</b> VOGEL, Alice, Marie; 6025 Dartford Way, Mid- dletown, OH 45044 (US). WAHL, Errol, Hoffman; 8021 Deersshadow Lane, Cincinnati, OH 45242 (US). CAPPEL, Jerome, Paul; 6356 Terra Court, Cincinnati, OH 45248 (US). WARD, Thomas, Carl; 4756 Susannah Drive, Blacksburg, VA 24060 (US).  <b>(74) Agents:</b> REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).		<b>(81) Designated States:</b> BR, CA, CZ, FI, HU, JP, MX, NO, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>
<b>(54) Title:</b> WRINKLE REDUCING COMPOSITION		
<b>(57) Abstract</b>		
<p>The present invention relates to a wrinkle reducing composition for use on fabrics, particularly clothing. The composition comprises a wrinkle reducing active, which is made up of an effective amount of silicone and an effective amount of film-forming polymer, and a liquid carrier. The composition is substantially free of starch, modified starch, and mixtures thereof, and results a Loss Modulus Difference of greater than about <math>3.3 \times 10^7</math> Pascal on fabric. The composition can be incorporated into a spray dispenser that can create an article of manufacture that can facilitate treatment of fabric with the wrinkle reducing composition. The wrinkle reducing actives in the composition can be determined through Dynamic Mechanical Analysis using a 100 % cotton broadcloth swatch and a fixed volume of a sample of wrinkle reducing active.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## WRINKLE REDUCING COMPOSITION

5

TECHNICAL FIELD

The present invention relates to fabric care compositions and to a method for  
10 treating fabrics in order to improve various properties of fabrics, in particular,  
reduction or removal of unwanted wrinkles.

BACKGROUND OF THE INVENTION

Wrinkles in fabrics are caused by the bending and creasing of the textile  
material which places an external portion of a filament in a yarn under tension while  
15 the internal portion of that filament in the yarn is placed under compression.  
Particularly with cotton fabrics, the hydrogen bonding that occurs between the  
cellulose molecules contributes to keeping wrinkles in place. The wrinkling of fabric,  
in particular clothing, is therefore subject to the inherent tensional elastic deformation  
and recovery properties of the fibers which constitute the yarn and fabrics.

20 In the modern world, with the increase of hustle and bustle and travel, there is  
a demand for a quick fix which will help to diminish the labor involved in home  
laundry and/or the cost and time involved in dry cleaning or commercial  
laundry. This has brought additional pressure to bear on textile technologists to  
produce a product that will sufficiently reduce wrinkles in fabrics, especially clothing,  
25 and to produce a good appearance through a simple, convenient application of a  
product.

The present invention reduces wrinkles from fabrics, including clothing, dry  
cleanables, and draperies, without the need for ironing. The present invention can be  
used on damp or dry clothing to relax wrinkles and give clothes a ready to wear look  
30 that is demanded by today's fast paced world. The present invention also essentially  
eliminates the need for touch up ironing usually associated with closet, drawer, and  
suitcase storage of garments.

When ironing is desired however, the present invention can also act as an  
excellent ironing aid. The present invention makes the task of ironing easier and  
35 faster by creating less iron drag. When used as an ironing aid, the composition of the  
present invention produces a crisp, smooth appearance similar to that of spray starch

ironing aids without the dry residue or flaking that occurs with typical spray starch ironing aids

An additional benefit of the composition of the present invention is an in-wear wrinkle control benefit. The composition of the present invention can help to prevent future wrinkles from forming in the fabric even after the fabric has been through a wash cycle.

#### SUMMARY OF THE INVENTION

The present invention relates to a wrinkle reducing composition, comprising:

- A. a wrinkle reducing active, comprising:
  - 1. an effective amount of silicone;
  - 2. an effective amount of film-forming polymer; and
- B. a liquid carrier; and

wherein said wrinkle reducing active is substantially free of starch, modified starch, and mixtures thereof, and wherein said wrinkle reducing composition results in a Loss Modulus Difference, as described hereinafter, of greater than about  $3.3 \times 10^7$  Pascal on fabric and/or a Durable Press Grade of from about 3.3 to about 4.8 on fabric.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a wrinkle reducing composition, comprising:

- A. a wrinkle reducing active, comprising:
  - 1. an effective amount of silicone;
  - 2. an effective amount of film-forming polymer; and
- B. a liquid carrier; and

wherein said wrinkle reducing active is substantially free of starch, modified starch, and mixtures thereof, and wherein said wrinkle reducing composition results a Loss Modulus Difference of greater than about  $3.3 \times 10^7$  Pascal on fabric.


#### A. WRINKLE REDUCING ACTIVES

##### I. SILICONE

The present invention, in one aspect, uses silicone to impart a lubricating property or increased gliding ability to fibers in fabric, particularly clothing.

Any type of silicone can be used to impart the lubricating property of the present invention however, some silicones and mixtures of silicones are more preferred. The word "silicone" as used herein refers to emulsified silicones, including those that are commercially available and those that are emulsified in the composition, unless otherwise described. Some non-limiting examples of silicones which are useful in the present invention are: Non-volatile silicone fluids such as polydimethylsiloxane gums and fluids, aminosilicones, reactive silicones and

phenylsilicones. More specifically, materials such as polyalkyl or polyaryl silicones with the following structure:

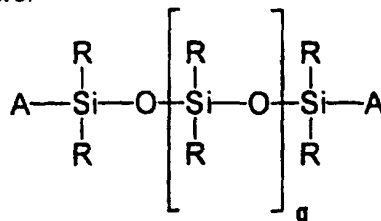

The alkyl or aryl groups substituted on the siloxane chain (R) or at the ends of the siloxane chains (A) can have any structure as long as the resulting silicones remain fluid at room temperature. Preferably, the silicones are hydrophobic, are neither irritating, toxic, nor otherwise harmful when applied to fabric or when they come in contact with human skin, are compatible with other components of the composition, are chemically stable under normal use and storage conditions, and are capable of being deposited on fabric.

The R group preferably is a phenyl, a hydroxy, an alkyl or an aryl. The two R groups on the silicone atom can represent the same group or different groups. More preferably, the two R groups represent the same group preferably, a methyl, an ethyl, a propyl, a phenyl or a hydroxy group. q is preferably an integer from about 7 to about 8,000.

"A" represents groups which block the ends of the silicone chains. Suitable A groups include hydrogen, methyl, methoxy, ethoxy, hydroxy, propoxy, and aryloxy. The preferred silicones are polydimethyl siloxanes; more preferred silicones are polydimethyl siloxanes having a viscosity of greater than about 10,000 centistokes (cst) at 25°C; and a most preferred silicone is a reactive silicone, i.e., where A is an OH group.

Suitable methods for preparing these silicone materials are disclosed in U.S. Pat. Nos. 2,826,551 and 3,964,500, incorporated herein by reference. Silicones useful in the present invention are also commercially available. Suitable examples include silicones offered by Dow Corning Corporation.

Other useful silicone materials include materials of the formula:

ironing aids without the dry residue or flaking that occurs with typical spray starch ironing aids

An additional benefit of the composition of the present invention is an in-wear wrinkle control benefit. The composition of the present invention can help to prevent  
5 future wrinkles from forming in the fabric even after the fabric has been through a wash cycle.

### SUMMARY OF THE INVENTION

The present invention relates to a wrinkle reducing composition, comprising:

- A. a wrinkle reducing active, comprising:
  - 10 1. an effective amount of silicone;
  - 2. an effective amount of film-forming polymer; and
- B. a liquid carrier; and

wherein said wrinkle reducing active is substantially free of starch, modified starch, and mixtures thereof, and wherein said wrinkle reducing composition results in a  
15 Loss Modulus Difference, as described hereinafter, of greater than about  $3.3 \times 10^7$  Pascal on fabric and/or a Durable Press Grade of from about 3.3 to about 4.8 on fabric.

### DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a wrinkle reducing composition, comprising:

- 20 A. a wrinkle reducing active, comprising:
  - 1. an effective amount of silicone;
  - 2. an effective amount of film-forming polymer; and
- B. a liquid carrier; and

wherein said wrinkle reducing active is substantially free of starch, modified starch,  
25 and mixtures thereof, and wherein said wrinkle reducing composition results a Loss Modulus Difference of greater than about  $3.3 \times 10^7$  Pascal on fabric.

### A. WRINKLE REDUCING ACTIVES

#### I. SILICONE


The present invention, in one aspect, uses silicone to impart a lubricating  
30 property or increased gliding ability to fibers in fabric, particularly clothing.

Any type of silicone can be used to impart the lubricating property of the present invention however, some silicones and mixtures of silicones are more preferred. The word "silicone" as used herein refers to emulsified silicones, including those that are commercially available and those that are emulsified in the  
35 composition, unless otherwise described. Some non-limiting examples of silicones which are useful in the present invention are: Non-volatile silicone fluids such as polydimethylsiloxane gums and fluids, aminosilicones, reactive silicones and

f denotes an integer of at least about 2.

In the formulas herein, each definition is applied individually and averages are included.

Another silicone material which can be used, but is not preferred, has the formula:

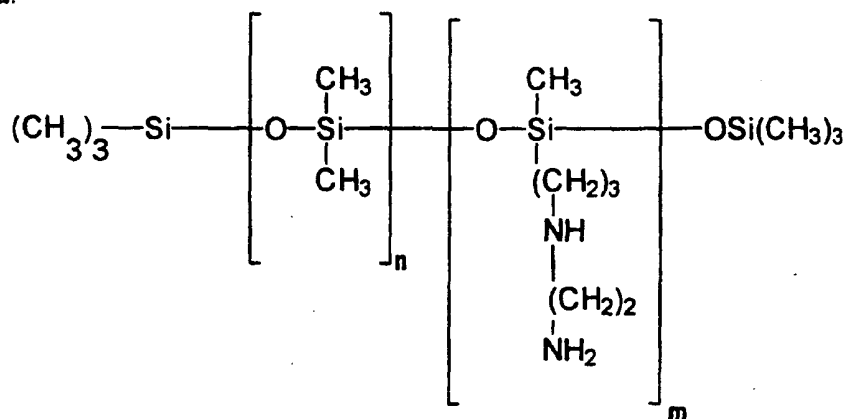

wherein n and m are the same as before.

Alternatively, the silicone material can be provided by a single material. Examples of such materials are copolymers having siloxane macromers grafted thereto, which meet the functional limitations as defined above. That is, the non-silicone backbone of such polymers should have a molecular weight of from about 5,000 to about 1,000,000, and the polymer should have a glass transition temperature (T<sub>g</sub>), i.e., the temperature at which the polymer changes from a brittle vitreous state to a plastic state, of greater than about -20°C. This material is not preferred when the carrier is more than about 95% water.

The silicones used in the present invention typically have a viscosity of from about 1,000 (cst) to about 2,000,000 (cst), preferably from about 1,000 (cst) to about 1,500,000 (cst), more preferably from about 1,000 (cst) to about 1,000,000 (cst).

When silicone is present, it is present at least an effective amount to provide lubrication of the fibers, typically from about 0.1% to about 4.5%, preferably from about 0.2% to about 4.0%, more preferably from about 0.3% to about 3.0%, by weight of the composition. Silicones present at levels higher than about 4.5%, by weight of the composition are not preferred because they can cause oil spots to appear on the fabric.

## II. FILM-FORMING POLYMER

The present invention, in one aspect, uses film-forming polymer to impart shape retention to fabric, particularly clothing. Any type of film-forming polymer can be used to impart shape retention however, some film-forming polymers are more

preferred. The film-forming polymers useful in the present invention are comprised of monomers. Some nonlimiting examples of monomers which can be used to form the film-forming polymers of the present invention include: adipic acid; ethenyl formamide; diethylene triamine; vinyl amine; acrylic acid; methacrylic acid; N,N-dimethylacrylamide; N-t-butyl acrylamide; maleic acid; maleic anhydride, and its half esters; crotonic acid; itaconic acid; acrylamide; acrylate alcohols; hydroxyethyl methacrylate; vinyl pyrrolidone; vinyl ethers (such as methyl vinyl ether); maleimides; vinyl pyridine; vinyl imidazole and other polar vinyl heterocyclics; styrene sulfonate; allyl alcohol; vinyl alcohol (produced by the hydrolysis of vinyl acetate after polymerization); vinyl caprolactam; acrylic or methacrylic acid esters of C<sub>1</sub>-C<sub>18</sub> alcohols, such as methanol, ethanol, 1-propanol, 2-propanol, 1-butanol, 2-methyl-1-propanol, 1-pentanol, 2-pentanol, 3-pentanol, 2-methyl-1-butanol, 1-methyl-1-butanol, 3-methyl-1-butanol, 1-methyl-1-pentanol, 2-methyl-1-pentanol, 3-methyl-1-pentanol, t-butanol, cyclohexanol, neodecanol, 2-ethyl-1-butanol, 3-heptanol, benzyl alcohol, 2-octanol, 6-methyl-1-heptanol, 2-ethyl-1-hexanol, 3,5-dimethyl-1-hexanol, 3,5,5-trimethyl-1-hexanol, 1-decanol, and the like, the alcohols having from about 1-18 carbon atoms with the average number of carbon atoms being from about 4 to about 12; styrene; polystyrene macromer; vinyl acetate; vinyl chloride; vinylidene chloride; vinyl propionate; alpha-methylstyrene; t-butylstyrene; butadiene; cyclohexadiene; ethylene; propylene; vinyl toluene; methoxy ethyl methacrylate; and mixtures thereof. Preferably, said monomers are selected from the group consisting of vinyl alcohol; vinylpyrrolidone; acrylic acid; dimethylaminoethyl methacrylate; ethyl acrylate; methyl methacrylate; methacrylic acid; diethylenetriamine; vinyl pyridine; adipic acid; and mixtures thereof.

Preferably, said monomers form homopolymers and/or copolymers (i.e., the film-forming polymer) having a glass transition temperature (T<sub>g</sub>) of from about -20°C to about 150°C, preferably from about -10°C to about 150°C, more preferably from about 0°C to about 80°C. Preferably said film-forming polymer is soluble and/or dispersible in water and/or alcohol. Said film-forming polymer preferably has a molecular weight of at least about 500, more preferably from about 1,000 to about 2,000,000, most preferably from about 5,000 to about 1,000,000.

Some non-limiting examples of homopolymers and copolymers which can be used as the film-forming polymers of the present invention are: adipic acid / dimethylaminohydroxypropyl diethylenetriamine copolymer; adipic acid / epoxypropyl diethylenetriamine copolymer; poly(vinylpyrrolidone/dimethylaminoethyl methacrylate); polyvinyl alcohol; polyvinylpyridine n-oxide; methacryloyl ethyl betaine / methacrylates copolymer;



ethyl acrylate / methyl methacrylate / methacrylic acid / acrylic acid copolymer; polyamine resins; and polyquaternary amine resins; poly(ethenylformamide); poly(vinylamine) hydrochloride; poly(vinyl alcohol-co-6% vinylamine); poly(vinyl alcohol-co-12% vinylamine); poly(vinyl alcohol-co-6% vinylamine hydrochloride);  
5 and poly(vinyl alcohol-co-12% vinylamine hydrochloride). Preferably, said copolymer and/or homopolymers are selected from the group consisting of adipic acid / dimethylaminohydroxypropyl diethylenetriamine copolymer; poly(vinylpyrrolidone/dimethylaminoethyl methacrylate); polyvinyl alcohol; ethyl acrylate / methyl methacrylate / methacrylic acid / acrylic acid copolymer;  
10 methacryloyl ethyl betaine / methacrylates copolymer; polyquaternary amine resins; poly(ethenylformamide); poly(vinylamine) hydrochloride; poly(vinyl alcohol-co-6% vinylamine); poly(vinyl alcohol-co-12% vinylamine); poly(vinyl alcohol-co-6% vinylamine hydrochloride); and poly(vinyl alcohol-co-12% vinylamine hydrochloride).

15 The film-forming polymer of the present invention is present at least an effective amount to provide shape retention, typically from about 0.1% to about 4.5%, preferably from about 0.2% to about 3%, more preferably from about 0.3% to about 2%, by weight of the composition. Polymer levels higher than about 4.5%, by weight of the composition, are not preferred due to the fact that an undesirable  
20 stiffness in the fabric can occur at these higher levels.

### III. SILICONE AND FILM-FORMING POLYMER MIXTURE

The wrinkle reducing active of the present invention, in the preferred aspect, comprises a mixture of the silicone and the film-forming polymer which together produce specific filming characteristics on fabric. The filming properties of the  
25 wrinkle reducing active on the fabric are measured using Dynamic Mechanical Analysis (DMA) with the Perkin Elmer DMA 7 in tangential fiber extension geometry. Differences found in the Loss Modulus measurement of composition on fabric correlates with the Durable Press Grades (AATCC Method #124), hereinafter "DP grades", for garment appearance after treatment with the compositions of the  
30 present invention.

#### A. Dynamic Mechanical Analysis

Accordingly, in another preferred aspect, the invention comprises using Dynamic Mechanical Analysis, as described hereinafter to identify acceptable active mixtures. A more detailed discussion of Dynamic Mechanical Analysis can be found  
35 in "Anelastic and Dielectric Effects in Polymeric Solids," N.G. McCrum, B.E. Read, and G. Williams, incorporated herein by reference.

Using DMA, the rheological properties of compositions can be measured under oscillating load using differing geometries (extensional, parallel, three point bending, and cantilever) and measurement techniques (temperature scan, time scan, frequency scan, creep recovery, and stress scan). The Dynamic Mechanical Analysis method involves applying a fixed volume of liquid sample to a fabric swatch in a tangential fiber extension geometry and monitoring the change in the fabric's ability to dampen the applied stress over time as the sample dries on the surface. DMA measures the Loss Modulus (energy loss) over time as the wet fabric dries. The reported quantity is the Loss Modulus Difference (LMD), the value for the dry fabric minus the value for the wet fabric. It is calculated as an average value over time for the wet and dry fabric portions of the run. Larger values of LMD correlate to higher DP grades for garment appearance. This procedure can be used to determine the operability of many compositions.

**B. Filming Characteristics (Loss Modulus Difference)**

The Loss Modulus Parameter represents viscous loss, the ability of the sample to adjust to applied stress through energy absorption in the form of molecular rearrangement. Not to be limited by theory, it is believed that as compositions dry on the fabric, they transition from a very low viscosity liquid to a film with both elastic and viscous properties. The compositions' ability to flow, in a molecular sense, influences the properties of the resulting coverage on the fabric fibers. Compositions with a greater Loss Modulus Difference, or ability to flow, provide more flexibility to the fabric therefore, relaxing the wrinkles and maintaining the fiber shape in the fabric.

Specifically, the compositions of the present invention are tested as follows. A 5.3mm x 20mm swatch of 100% cotton broadcloth is mounted in extensional geometry in a Perkin Elmer DMA 7, available from Perkin Elmer Corp. It is important to keep the swatch centered and square to the geometry. Typically from about 10 microliters to about 25 microliters, preferably from about 15 microliters to about 25 microliters, more preferably from about 20 microliters to about 25 microliters, in three equal aliquots, of a liquid sample of the composition is applied using a microliter pipette in a way so as not to overwet the swatch or cause liquid to run off of the fabric. It is preferable to apply the sample near the upper portion of the swatch and allow it to wick down the swatch. Once the sample is applied, no longer than 2 minutes are allowed to elapse before the run begins. The sample height is read instrumentally; the stress values for analysis are set, 500mN for static stress, 450mN for dynamic test, and 110% tension; the furnace is raised; the temperature is allowed to equilibrate; and the run is begun. Typically, the analysis is run at a

temperature of from about 20°C to about 30°C. After the run, the data is smoothed using the Standard Smooth Routine in Change Curvetype<sup>®</sup> software to calculate the average wet and dry fabric ranges, this software accompanies the Perkin Elmer DMA 7. A table is made of data points in the Select Calc<sup>®</sup> software, accompanying the Perkin Elmer DMA 7, starting at time 0.0 minutes with 0.7 minute increments. The values corresponding to times 2.8 - 7.7 minutes are averaged for the wet region, and 25.9 - 29.4 are averaged for the dry region. LMD is the dry region minus the wet region. Times can vary somewhat with each instrument and calibration, therefore, time are typically averaged over 4 to 5 minutes in the wet region and 4 to 5 minutes in the dry region. Through the above described analysis it is determined that the wrinkle reducing active of the present invention should have a LMD of greater than about  $3.3 \times 10^7$  Pascal, preferably from about  $3.3 \times 10^7$  Pascal to about  $5.5 \times 10^7$  Pascal, more preferably from about  $4.0 \times 10^7$  Pascal to about  $5.5 \times 10^7$  Pascal, and even more preferably from about  $4.7 \times 10^7$  Pascal to about  $5.5 \times 10^7$  Pascal in order to work effectively. Wrinkle reducing actives which have a loss modulus difference within these ranges typically show smooth surfaced, web-like, and pliable filming characteristics while wrinkle reducing actives which have a LMD below this range typically exhibit films which are brittle and rough surfaced. The composition of the present invention typically results in a DP grades on the fabric of from about 3.3 to about 4.8, preferably from about 3.5 to about 4.8, more preferably from about 3.8 to about 4.8.

### C. Wrinkle Reducing Active

Any silicone and any film-forming polymer can be combined to produce the preferred wrinkle reducing active as long as the combination produces a Loss Modulus Difference within the desired ranges however, some silicone/polymer combinations are more preferred as the wrinkle reducing active. The wrinkle reducing active is preferably selected from the combinations consisting of aminoethylaminopropyl dimethyl siloxane and adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer; aminoethylaminopropyl dimethyl siloxane, hydroxy terminated dimethyl siloxane (Dimethiconol), and poly(vinylpyrrolidone/dimethylaminoethyl methacrylate); aminoethylaminopropyl dimethyl siloxane, hydroxy terminated dimethyl siloxane (Dimethiconol), and polyquaternary amine resin; hydroxy terminated dimethyl siloxane (Dimethiconol) and methacryloyl ethyl betaine / methacrylates copolymer; polydimethylsiloxane and ethyl acrylate / methyl methacrylate / methacrylic acid / acrylic acid copolymer; polydimethylsiloxane and adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer;

aminoethylaminopropyl dimethyl siloxane and poly(vinylpyrrolidone/dimethylaminoethyl methacrylate); hydroxy terminated dimethyl siloxane (Dimethiconol) and methacryloyl ethyl betaine / methacrylates copolymer; and polydimethylsiloxane and adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer. More preferably said wrinkle reducing active is selected from the combinations consisting of polydimethylsiloxane and adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer; and aminoethylaminopropyl dimethyl siloxane, hydroxy terminated dimethyl siloxane (Dimethiconol), and polyquaternary amine resin; even more preferably said wrinkle reducing active is selected from the combination consisting of hydroxy terminated dimethyl siloxane (Dimethiconol) and methacryloyl ethyl betaine / methacrylates copolymer; and polydimethylsiloxane and ethyl acrylate / methyl methacrylate / methacrylic acid / acrylic acid copolymer; and most preferably said wrinkle reducing active is selected from the combination consisting of aminoethylaminopropyl dimethyl siloxane and adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer; aminoethylaminopropyl dimethyl siloxane, hydroxy terminated dimethyl siloxane, and polyvinyl alcohol; and aminoethylaminopropyl dimethyl siloxane, hydroxy terminated dimethyl siloxane (Dimethiconol) and poly(vinylpyrrolidone/dimethylaminoethyl methacrylate).

Typically the weight ratio of silicone to film-forming polymer is from about 10:1 to about 1:10, preferably from about 5:1 to about 1:5, and more preferably from about 2:1 to about 1:2.

Typically, the preferred wrinkle reducing active is silicone plus film-forming polymer, present at a level of from about 0.1% to about 50%, preferably from about 0.5% to about 10%, more preferably from about 0.5% to about 2%, by weight of the composition.

Concentrated compositions can also be used in order to provide a less expensive product. When a concentrated product is used, i.e., when the wrinkle reducing active is from about 5% to about 50%, by weight of the composition, it is preferable to dilute the composition before treating fabric. Preferably, the wrinkle reducing active is diluted with about 50% to about 10,000%, more preferably from about 50% to about 8,000%, and even more preferably from about 50% to about 5,000%, by weight of the composition, of water.

#### B. Optional Ingredients

##### 35 1. Ethoxylated Surfactant

The composition of the present invention can optionally contain an ethoxylated surfactant. When an ethoxylated surfactant is added to the composition

of the present invention it is typically added at a level of from about 0.05% to about 3%, preferably from about 0.05% to about 2%, and more preferably from about 0.1% to about 1%, by weight of the composition. Said surfactant is preferably included when the composition is used in a spray dispenser in order to enhance the spray characteristics of the composition and allow the composition to distribute more evenly, and to prevent clogging of the spray apparatus. The ethoxylated surfactant includes compounds having the general formula:



10

wherein  $R^5$  is an alkyl aryl group or an alkyl group having from about 6 to about 18 carbon atoms, preferably from about 8 to about 14, more preferably from about 10 to about 14 carbon atoms;  $s$  is an integer from about 3 to about 45, preferably from about 3 to about 20, more preferably from about 5 to about 15; and  $B$  is a hydrogen, a carboxylate group, or a sulfate group.


15

Preferably said ethoxylated surfactant is selected from the group consisting of carboxylated alcohol ethoxylate, also known as ether carboxylate, having a hydrophobic group with from about 12 to about 16 carbon atoms and from about 5 to about 13 ethoxylate groups; alcohol ethoxylate or secondary alcohol ethoxylate having from about 8 to about 20 carbon atoms and from about 4 to about 50 ethoxylate groups; and alkyl phenyl ethoxylate or alkyl aryl ethoxylate having from about 8 to about 10 carbon atoms, preferably from about 14 to 18 carbon atoms and from about 4 to about 50 ethoxylate groups.

20

Another ethoxylated surfactant suitable for use in the present invention has the formula:

25



wherein

PE represents  $-\text{CH}_2\text{CH}_2\text{CH}_2\text{O}(\text{EO})_g(\text{PO})_h\text{Z}$ ;

Me represents methyl;

30

EO represents ethyleneoxy;

PO represents 1,2-propyleneoxy;

Z can be either a hydrogen or a lower alkyl radical; and

$c + d + g + h$  have values which combine to give a molecular weight of from about 600 to about 25,000.

35

Other ethoxylated surfactants suitable for use in the present invention include ethoxylated quaternary ammonium surfactants. Some preferred ethoxylated

quaternary ammonium surfactants include PEG-5 cocomonium methosulfate; PEG-15 cocomonium chloride; PEG-15 oleammonium chloride; and bis(polyethoxyethanol)tallow ammonium chloride.


## 2. Soil Release Polymers

5 In the present invention, an optional soil release agent can be added. The wrinkle reducing composition of the present invention herein can contain from about 0% to about 5%, preferably from about 0.05% to about 3%, more preferably from about 0.1% to about 2%, by weight of the composition, of soil release agent. Polymeric soil release agents useful in the present invention include copolymeric  
10 blocks of terephthalate and polyethylene oxide or polypropylene oxide, and the like.

A preferred soil release agent is a copolymer having blocks of terephthalate and polyethylene oxide. More specifically, these polymers are comprised of repeating units of ethylene terephthalate and polyethylene oxide terephthalate at a molar ratio of ethylene terephthalate units to polyethylene oxide terephthalate units  
15 of from about 25:75 to about 35:65, said polyethylene oxide terephthalate containing polyethylene oxide blocks having molecular weights of from about 300 to about 2000. The molecular weight of this polymeric soil release agent is in the range of from about 5,000 to about 55,000.

Another preferred polymeric soil release agent is a crystallizable polyester  
20 with repeat units of ethylene terephthalate units containing from about 10% to about 15% by weight of ethylene terephthalate units together with from about 10% to about 50% by weight of polyoxyethylene terephthalate units, derived from a polyoxyethylene glycol of average molecular weight of from about 300 to about 6,000, and the molar ratio of ethylene terephthalate units to polyoxyethylene  
25 terephthalate units in the crystallizable polymeric compound is between 2:1 and 6:1. Examples of this polymer include the commercially available materials Zelcon 4780® (from Dupont) and Milease T® (from ICI).

Highly preferred soil release agents are polymers of the generic formula:



in which each X can be a suitable capping group, with each X typically being selected from the group consisting of H, and alkyl or acyl groups containing from about 1 to about 4 carbon atoms. each t is selected for water solubility and generally is from  
35 about 6 to about 113, preferably from about 20 to about 50. u is critical to formulation in a liquid composition having a relatively high ionic strength. There

should be very little material in which u is greater than 10. Furthermore, there should be at least 20%, preferably at least 40%, of material in which u ranges from about 3 to about 5.

The  $R^6$  moieties are essentially 1,4-phenylene moieties. As used herein, the term "the  $R^6$  moieties are essentially 1,4-phenylene moieties" refers to compounds where the  $R^6$  moieties consist entirely of 1,4-phenylene moieties, or are partially substituted with other arylene or alkarylene moieties, alkylene moieties, alkenylene moieties, or mixtures thereof. Arylene and alkarylene moieties which can be partially substituted for 1,4-phenylene include 1,3-phenylene, 1,2-phenylene, 1,8-naphthylene, 1,4-naphthylene, 2,2-biphenylene, 4,4-biphenylene, and mixtures thereof. Alkylene and alkenylene moieties which can be partially substituted include 1,2-propylene, 1,4-butylene, 1,5-pentylene, 1,6-hexamethylene, 1,7-heptamethylene, 1,8-octamethylene, 1,4-cyclohexylene, and mixtures thereof.

For the  $R^6$  moieties, the degree of partial substitution with moieties other than 1,4-phenylene should be such that the soil release properties of the compound are not adversely affected to any great extent. Generally the degree of partial substitution which can be tolerated will depend upon the backbone length of the compound, i.e., longer backbones can have greater partial substitution for 1,4-phenylene moieties. Usually, compounds where the  $R^6$  comprise from about 50% to about 100% 1,4-phenylene moieties (from 0% to about 50% moieties other than 1,4-phenylene) have adequate soil release activity. For example, polyesters made according to the present invention with a 40:60 mole ratio of isophthalic (1,3-phenylene) to terephthalic (1,4-phenylene) acid have adequate soil release activity. However, because most polyesters used in fiber making comprise ethylene terephthalate units, it is usually desirable to minimize the degree of partial substitution with moieties other than 1,4-phenylene for best soil release activity. Preferably, the  $R^6$  moieties consist entirely of (i.e., comprise 100%) 1,4-phenylene moieties, i.e., each  $R^6$  moiety is 1,4-phenylene.

For the  $R^7$  moieties, suitable ethylene or substituted ethylene moieties include ethylene, 1,2-propylene, 1,2-butylene, 1,2-hexylene, 3-methoxy-1,2-propylene, and mixtures thereof. Preferably, the  $R^7$  moieties are essentially ethylene moieties, 1,2-propylene moieties, or mixtures thereof. Inclusion of a greater percentage of ethylene moieties tends to improve the soil release activity of compounds. Surprisingly, inclusion of a greater percentage of 1,2-propylene moieties tends to improve the water solubility of compounds.

Therefore, the use of 1,2-propylene moieties or a similar branched equivalent is desirable for incorporation of any substantial part of the soil release component in

the liquid fabric softener compositions. Preferably, from about 75% to about 100%, are 1,2-propylene moieties.

A more complete disclosure of soil release agents is contained in U.S. Pat. Nos.: 4,661,267, Decker, Konig, Straathof, and Gosselink, issued Apr. 28, 1987; 4,711,730, Gosselink and Diehl, issued Dec. 8, 1987; 4,749,596, Evans, Huntington, Stewart, Wolf, and Zimmerer, issued June 7, 1988; 4,818,569, Trinh, Gosselink, and Rattinger, issued April 4, 1989; 4,877,896, Maldonado, Trinh, and Gosselink, issued Oct. 31, 1989; 4,956,447, Gosselink et al., issued Sept. 11, 1990; and 4,976,879, Maldonado, Trinh, and Gosselink, issued Dec. 11, 1990, all of said patents being incorporated herein by reference.

### 3. Antistatic Agents


The composition of the present invention can optionally include antistatic agents. When said antistatic agents are present in the composition they are present at a level of from about 0% to about 5%, preferably from about 0.005% to about 5%, more preferably from about 0.05% to about 2%, and most preferably from about 0.2% to about 1%, by weight of the composition. Preferred antistatic agents of the present invention are cationic surfactants, preferably quaternary ammonium salts having the general formulas:



wherein the  $R^8$  group is a  $C_{10}$ - $C_{22}$  hydrocarbon group, preferably a  $C_{12}$ - $C_{18}$  alkyl group or the corresponding ester linkage interrupted group with a short alkylene ( $C_1$ - $C_4$ ) group between the ester linkage and the N, and having a similar terminal hydrocarbon group, .g., a fatty acid ester of choline, preferably  $C_{12}$ - $C_{14}$  (coco) choline ester and/or  $C_{16}$ - $C_{18}$  tallow choline ester. Each  $R^9$  is a  $C_1$ - $C_4$  alkyl or substituted (e.g., hydroxy) alkyl, or hydrogen, preferably methyl; each  $R^{10}$  is a benzyl group; and the counterion  $X^-$  is a softener compatible anion, for example, chloride, bromide, methyl sulfate, etc. Some preferred quaternary ammonium compounds include alkyl benzyl dimethyl ammonium chloride; dicoco quaternary ammonium chloride; coco dimethyl benzyl ammonium chloride; soya trimethyl quaternary ammonium chloride; hydrogenated tallow dimethyl benzyl ammonium chloride; and methyl dihydrogenated tallow benzyl ammonium chloride.




Other preferred antistatic agents of the present invention are alkyl imidazolinium salts having the general formula:

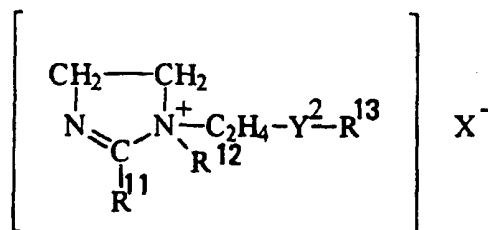

- 5 wherein  $\text{Y}^2$  is  $-\text{C}(\text{O})-\text{O}-$ ,  $-\text{O}-(\text{O})-\text{C}-$ ,  $-\text{C}(\text{O})-\text{N}(\text{R}^{14})-$ , or  $-\text{N}(\text{R}^{14})-\text{C}(\text{O})-$  in which  $\text{R}^{14}$  is hydrogen or a  $\text{C}_1$ - $\text{C}_4$  alkyl radical;  $\text{R}^{11}$  and  $\text{R}^{13}$  are each independently selected from  $\text{R}^8$  and  $\text{R}^9$  as defined hereinbefore for the cationic surfactant, with only one being  $\text{R}^8$ ; and each  $\text{R}^{12}$  is a  $\text{C}_1$ - $\text{C}_4$  alkyl radical.

- Other suitable antistatic agents are the ion pairs of, e.g., anionic detergent  
10 surfactants and fatty amines, or quaternary ammonium derivatives thereof, e.g., those disclosed in U.S. Pat. No. 4,756,850, Nayar, issued July 12, 1988, said patent being incorporated herein by reference. The ion pair complexes can be represented by the following formula:



- 15 wherein each  $\text{R}^{14}$  can independently be  $\text{C}_{12}$ - $\text{C}_{20}$  alkyl or alkenyl, and  $\text{R}^{15}$  is H or  $\text{CH}_3$ .  $\text{A}^-$  represents an anionic compound and includes a variety of anionic surfactants, as well as related shorter alkyl chain compounds which need not exhibit surface activity.  $\text{A}^-$  is selected from the group consisting of alkyl sulfonates, aryl  
20 sulfonates, alkylaryl sulfonates, alkyl sulfates, dialkyl sulfosuccinates, alkyl oxybenzene sulfonates, acyl isethionates, acylalkyl taurates, alkyl ethoxylates sulfates, olefin sulfates, preferably benzene sulfonates, and  $\text{C}_1$ - $\text{C}_5$  linear alkyl benzene sulfonates, or mixtures thereof.

- Other suitable antistatic agents are ethoxylated and/or propylated sugar  
25 derivatives. Said sugar derivatives have an empirical formula as follows:



- wherein  $\text{R}^{16}$  is a hydrophobic group containing from about 8 to about 30, preferably  
from about 12 to about 22, more preferably from about 16 to about 18 carbon atoms;  
"sugar" refers to a polyhydroxy group, preferably derived from sugar, sugar alcohol,  
30 or similar polyhydroxy compound;  $\text{R}^{17}$  is an alkylene group, preferably ethylene or

propylene, more preferably ethylene; z is a number from 1 to about 4, preferably 2; and w is a number from about 5 to about 100, preferably from about 10 to about 40. A preferred compound of this type is polyethoxylated sorbitan monostearate, e.g., Glycosperse S-20<sup>®</sup> from Lonza, which contains about 20 ethoxylate moieties per molecule.

#### 4. Other Optional Ingredients

The present invention can include optional components conventionally used in textile treatment compositions, for example, colorants, perfumes, preservatives, bactericides, optical brighteners, opacifiers, surfactants, anti-shrinkage agents, germicides, fungicides, anti-oxidants, and the like. The compositions are preferably free of any material that would soil or stain fabric, and are also substantially free of starch. Typically, there should be less than about 0.5%, by weight of the composition, preferably less than about 0.3%, more preferably less than about 0.1%, by weight of the composition, of starch and/or modified starch.

#### C. Liquid Carrier

The liquid carrier used in the composition of the present invention is preferably an aqueous system comprising water. Optionally, but not preferably, in addition to the water, the carrier can contain a low molecular weight organic solvent that is highly soluble in water, e.g., C<sub>1</sub>-C<sub>4</sub> monohydric alcohols, C<sub>2</sub>-C<sub>6</sub> polyhydric alcohols, such as alkylene glycols, polyalkylene glycols, etc., alkylene carbonates, and mixtures thereof. Examples of these water-soluble solvents include ethanol, propanol, isopropanol, etc. Water is a preferred liquid carrier due to its low cost, availability, safety, and environmental compatibility. Water can be distilled, deionized, or tap water.

The level of liquid carrier in the compositions of the present invention is typically greater than about 80%, preferably greater than about 90%, more preferably greater than about 95%, by weight of the composition. When a concentrated composition is used, the level of liquid carrier is typically from about 50% to about 95%, by weight of the composition, preferably from about 60% to about 93%, more preferably from about 60% to about 85%, by weight of the composition.

#### D. Packaging

In another aspect of the invention, an article of manufacture is provided that comprises an article of manufacture comprising a wrinkle reducing composition comprising a wrinkle reducing active selected from the group consisting of an effective amount of silicone, an effective amount of film-forming polymer and mixtures thereof, and a liquid carrier, and a spray dispensing device.

The dilute compositions, i.e., compositions containing from about 0.1% to about 5%, by weight of the composition, of wrinkle reducing active, of the present invention are preferably sprayed onto fabrics and therefore are typically packaged in a spray dispenser. The spray dispenser can be any of the manually activated means for producing a spray of liquid droplets as is known in the art, e.g. trigger-type, pump-type, non-aerosol self-pressurized, and aerosol-type spray means. It is preferred that at least about 70%, more preferably, at least about 80%, most preferably at least about 90% of the droplets have a particle size of smaller than about 200 microns.

The spray dispenser can be an aerosol dispenser. Said aerosol dispenser comprises a container which can be constructed of any of the conventional materials employed in fabricating aerosol containers. The dispenser must be capable of withstanding internal pressure in the range of from about 20 to about 110 p.s.i.g., more preferably from about 20 to about 70 p.s.i.g. The one important requirement concerning the dispenser is that it be provided with a valve member which will permit the wrinkle reducing composition contained in the dispenser to be dispensed in the form of a spray of very fine, or finely divided, particles or droplets. The aerosol dispenser utilizes a pressurized sealed container from which the wrinkle reducing composition is dispensed through a special actuator/valve assembly under pressure. The aerosol dispenser is pressurized by incorporating therein a gaseous component generally known as a propellant. Common aerosol propellants, e.g., gaseous hydrocarbons such as isobutane, and mixed halogenated hydrocarbons, are not preferred. Halogenated hydrocarbon propellants such as chlorofluoro hydrocarbons have been alleged to contribute to environmental problems. Preferred propellants are compressed air, nitrogen, inert gases, carbon dioxide, etc. A more complete description of commercially available aerosol-spray dispensers appears in U.S. Pat. Nos.: 3,436,772, Stebbins, issued April 8, 1969; and 3,600,325, Kaufman et al., issued August 17, 1971; both of said references are incorporated herein by reference.

Preferably the spray dispenser can be a self-pressurized non-aerosol container having a convoluted liner and an elastomeric sleeve. Said self-pressurized dispenser comprises a liner/sleeve assembly containing a thin, flexible radially expandable convoluted plastic liner of from about 0.010 to about 0.020 inch thick, inside an essentially cylindrical elastomeric sleeve. The liner/sleeve is capable of holding a substantial quantity of odor-absorbing fluid product and of causing said product to be dispensed. A more complete description of self-pressurized spray dispensers can be found in U.S. Pat. Nos. 5,111,971, Winer, issued May 12, 1992, and 5,232,126, Winer, issued Aug. 3, 1993; both of said references are herein incorporated by reference. Another type of aerosol spray dispenser is one wherein a barrier separates

the wrinkle reducing composition from the propellant (preferably compressed air or nitrogen), as is disclosed in U.S. Pat. No. 4,260,110, issued April 7, 1981, incorporated herein by reference. Such a dispenser is available from EP Spray Systems, East Hanover, New Jersey.

5        More preferably, the spray dispenser is a non-aerosol, manually activated, pump-spray dispenser. Said pump-spray dispenser comprises a container and a pump mechanism which securely screws or snaps onto the container. The container comprises a vessel for containing the wrinkle reducing composition to be dispensed.

10        The pump mechanism comprises a pump chamber of substantially fixed volume, having an opening at the inner end thereof. Within the pump chamber is located a pump stem having a piston on the end thereof disposed for reciprocal motion in the pump chamber. The pump stem has a passageway there through with a dispensing outlet at the outer end of the passageway and an axial inlet port located inwardly thereof.

15        The container and the pump mechanism can be constructed of any conventional material employed in fabricating pump-spray dispensers, including, but not limited to: polyethylene; polypropylene; polyethyleneterephthalate; blends of polyethylene, vinyl acetate, and rubber elastomer. Other materials can include stainless steel. A more complete disclosure of commercially available dispensing  
20        devices appears in: U.S. Pat. Nos.: 4,895,279, Schultz, issued January 23, 1990; 4,735,347, Schultz et al., issued April 5, 1988; and 4,274,560, Carter, issued June 23, 1981; all of said references are herein incorporated by reference.

25        Most preferably, the spray dispenser is a manually activated trigger-spray dispenser. Said trigger-spray dispenser comprises a container and a trigger both of which can be constructed of any of the conventional material employed in fabricating trigger-spray dispensers, including, but not limited to: polyethylene; polypropylene; polyacetal; polycarbonate; polyethyleneterephthalate; polyvinyl chloride; polystyrene; blends of polyethylene, vinyl acetate, and rubber elastomer. Other materials can include stainless steel and glass. The trigger-spray dispenser does not  
30        incorporate a propellant gas. The trigger-spray dispenser herein is typically one which acts upon a discrete amount of the wrinkle reducing composition itself, typically by means of a piston or a collapsing bellows that displaces the composition through a nozzle to create a spray of thin liquid. Said trigger-spray dispenser typically comprises a pump chamber having either a piston or bellows which is  
35        movable through a limited stroke response to the trigger for varying the volume of said pump chamber. This pump chamber or bellows chamber collects and holds the product for dispensing. The trigger spray dispenser typically has an outlet check

valve for blocking communication and flow of fluid through the nozzle and is responsive to the pressure inside the chamber. For the piston type trigger sprayers, as the trigger is compressed, it acts on the fluid in the chamber and the spring, increasing the pressure on the fluid. For the bellows spray dispenser, as the bellows is compressed, the pressure increases on the fluid. The increase in fluid pressure in either trigger spray dispenser acts to open the top outlet check valve. The top valve allows the product to be forced through the swirl chamber and out the nozzle to form a discharge pattern. An adjustable nozzle cap can be used to vary the pattern of the fluid dispensed.

For the piston spray dispenser, as the trigger is released, the spring acts on the piston to return it to its original position. For the bellows spray dispenser, the bellows acts as the spring to return to its original position. This action causes a vacuum in the chamber. The responding fluid acts to close the outlet valve while opening the inlet valve drawing product up to the chamber from the reservoir.

A more complete disclosure of commercially available dispensing devices appears in U.S. Pat. Nos. 4,082,223, Nozawa, issued Apr. 4, 1978; 4,161, 288, McKinney, issued Jul. 17, 1985; 4,434,917, Saito et al., issued Mar. 6, 1984; and 4,819,835, Tasaki, issued Apr. 11, 1989; 5,303,867, Peterson, issued Apr. 19, 1994; all of said references are incorporated herein by reference.

A broad array of trigger sprayers or finger pump sprayers are suitable for use with the compositions of this invention. These are readily available from suppliers such as Calmar, Inc., City of Industry, California; CSI (Continental Sprayers, Inc.), St. Peters, Missouri; Berry Plastics Corp., Evansville, Indiana - a distributor of Guala® sprayers; or Seaquest Dispensing, Cary, Illinois.

The preferred trigger sprayers are the blue inserted Guala® sprayer, available from Berry Plastics Corp., the Calmar TS800-1A® sprayers, available from Calmar Inc., or the CSI T7500® available from Continental Sprayers, Inc., because of the fine uniform spray characteristics, spray volume, and pattern size. Any suitable bottle or container can be used with the trigger sprayer, the preferred bottle is a 17 fl-oz. bottle (about 500 ml) of good ergonomics similar in shape to the Cinch® bottle. It can be made of any materials such as high density polyethylene, polypropylene, polyvinyl chloride, polystyrene, polyethylene terephthalate, glass, or any other material that forms bottles. Preferably, it is made of high density polyethylene or polyethylene terephthalate.

For smaller four fl-oz. size (about 118 ml), a finger pump can be used with canister or cylindrical bottle. The preferred pump for this application is the cylindrical Euromist II® from Seaquest Dispensing.

All percentages, ratios, and parts herein, in the Specification, Examples, and Claims, are by weight and are approximations unless otherwise stated.

#### E. METHOD OF USE

An effective amount of the composition of the present invention is preferably sprayed onto fabrics, particularly clothing. When the composition is sprayed onto fabric an effective amount should be deposited onto the fabric without causing saturation of the fabric, typically from about 10% to about 85%, preferably from about 15% to about 65%, more preferably from about 20% to about 50%, by weight of the fabric. The amount of active typically sprayed onto the fabric is from about 0.1% to about 4%, preferably from about 0.2% to about 3%, more preferably from about 0.3% to about 2%, by weight of the fabric. Once an effective amount of the composition is sprayed onto the fabric the fabric is optionally, but preferably stretched. The fabric is typically stretched perpendicular to the wrinkle. The fabric can also be smoothed by hand after it has been sprayed. The smoothing movement works particularly well on areas of clothing that have interface sewn into them, or on the hem of clothing. Once the fabric has been sprayed and optionally, but preferably, stretched, it is hung until dry.

The composition of the present invention can also be used as an ironing aid. An effective amount of the composition can be sprayed onto fabric, wherein said fabric should not be sprayed to saturation. The fabric can be ironed at the normal temperature at which it should be ironed. The fabric can be sprayed with an effective amount of the composition, allowed to dry and then ironed, or sprayed and ironed immediately.

The following are non-limiting examples of the instant compositions.

25

#### EXAMPLE I

		Wt. % Active in formula					
Material		% Activity	A	B	C	D	E
30	DC 108® <sup>1</sup>	35	1.05	---	0.53	---	0.53
	DC 1669® <sup>2</sup>	35	---	---	0.53	1.05	0.53
	GE SM2140® <sup>3</sup>	50	---	1.00	---	---	---
	Copolymer 958® <sup>4</sup>	50	---	---	0.50	---	---
	Cartaretin F-23® <sup>5</sup>	23	0.48	---	---	---	---
	Amerhold DR-25® <sup>6</sup>	25	---	0.50	---	---	---
35	Diaformer Z-SM® <sup>7</sup>	30	---	---	---	0.50	---
	Kymene 557H® <sup>8</sup>	12.5	---	---	---	---	0.50
	Sandopan DTC® <sup>9</sup>	90	0.30	0.10	0.10	0.10	0.10
	Perfume	100	0.01	0.01	0.01	0.01	0.01
	Preservative	1.5	0.0003	0.0003	0.0003	0.0003	0.0003
	DI Water	100	Balance	Balance	Balance	Balance	Balance

40

<sup>1</sup> Aminoethylaminopropyl dimethyl siloxane (viscosity of about 100,000 cst)

<sup>2</sup>Hydroxy terminated dimethyl siloxane also known as Dimethiconol (viscosity of about 1,000 cst)

<sup>3</sup>Polydimethylsiloxane (viscosity of about 10,000 cst)

<sup>4</sup>Poly(vinylpyrrolidone/dimethylaminoethyl methacrylate) MW about 100,000

<sup>5</sup>Adipic acid/dimethylaminohydroxypropyl diethylenetriamine copolymer

5 <sup>6</sup>Ethyl acrylate/methyl methacrylate/methacrylic acid/acrylic acid copolymer

<sup>7</sup>Methacryloyl ethyl betaine/methacrylates copolymer

<sup>8</sup>Polyquaternary amine resins

<sup>9</sup>Trideceth-7 Carboxylic acid

		% Activity	F	G	H	I	J
10	DC 108®	35	---	---	---	---	0.53
	DC 1669®	35	---	---	---	---	0.53
	GE SM2140®	50	---	1.00	---	---	---
	Sandoperm ME® <sup>10</sup>	20	---	---	0.80	---	---
15	DC 1784® <sup>11</sup>	35	---	---	---	1.20	---
	GE SM2068A® <sup>12</sup>	35	1.05	---	---	---	---
	Cartaretin F-23®	23	0.46	0.46	---	---	---
	Copolymer 937® <sup>13</sup>	20	---	---	0.65	---	---
	Vinex 2019® <sup>14</sup>	12.5	---	---	---	---	0.50
20	Diaformer Z-SM®	30	---	---	---	0.80	---
	Silwet L7607 <sup>15</sup>	100	---	0.10	---	---	---
	Neodol 23-6.5® <sup>16</sup>	100	---	---	0.20	0.10	0.10
	Sandopan DTC®	90	0.30	---	---	---	0.10
	Perfume	100	0.015	0.015	0.015	0.015	0.01
25	Preservative	1.5	0.0003	0.0003	0.0003	0.0003	0.0003
	DI Water	100	Balance	Balance	Balance	Balance	Balance

<sup>10</sup>Aminoethylaminopropyl dimethyl siloxane

<sup>11</sup>Hydroxy terminated dimethyl siloxane also known as Dimethiconol (viscosity of about 1,000,000 cst)

<sup>12</sup>Polydimethylsiloxane (viscosity of about 1,000,000 cst)

30 <sup>13</sup>Poly(vinylpyrrolidone/dimethylaminoethyl methacrylate) (molecular weight of about 1,000,000)

<sup>14</sup>Polyvinyl alcohol copolymer resin

<sup>15</sup>Polyethylene oxide modified polydimethylsiloxane

<sup>16</sup>C<sub>12</sub>-C<sub>13</sub> alkylpolyethoxylate (7)

	<u>FORMULA</u>	<u>DP GRADE</u>
35	A	4.5
	B	4.2
	C	4.6
	D	4.0
40	E	3.8
	F	3.5
	J	4.0

## Preparation of Example I

The ethoxylated surfactant is added to the deionized water at about 21°C to about 27°C with stirring. The film-forming polymer is added to the water/surfactant mixture and stirring is continued. The silicone is added to the mixture with a low amount of agitation to form a homogenous mixture. The perfume and antimicrobial are added. The mixture is stirred for about 3 to about 5 minutes with low agitation.

EXAMPLE II

10	<u>Material</u>	<u>%</u>	<u>K</u>	<u>L</u>	<u>M</u>	<u>N</u>	<u>O</u>	<u>P</u>	<u>Q</u>
		<u>Active</u>	<u>Wt. %</u>	<u>Wt. %</u>	<u>Wt. %</u>	<u>Wt. %</u>	<u>Wt. %</u>	<u>Wt. %</u>	<u>Wt. %</u>
	<u>Wt. %</u>								
	DC 108®	35	1.0	0.5	0.5	—	0.5	—	1.0
	DC 1669®	35	—	0.5	0.5	—	0.5	—	—
15	Softener DSW® <sup>17</sup>	40	—	—	—	1.0	—	—	—
	Sandoperm ME®	20	—	—	—	—	1.0	—	—
	Carteretin F-23®	23	0.5	—	—	—	—	—	—
	Copolymer 958®	50	—	0.5	—	—	—	0.5	—
	Vinex 2019®	12.5	—	—	0.5	—	—	—	—
20	Delsette 101® <sup>18</sup>	12.5	—	—	—	0.5	—	—	—
	Cypro 515® <sup>19</sup>	50	—	—	—	—	0.5	—	—
	Copolymer 937®	20	—	—	—	—	—	—	0.65
	Sandopan DTC®	90	0.3	0.1	0.1	0.1	0.1	0.1	0.2
	Perfume	100	100	0.015	0.015	0.015	0.015	0.015	0.015
25	Preservative	1.5	1.5	0.0003	0.0003	0.0003	0.0003	0.0003	0.0003
	DI Water			Balance	Balance	Balance	Balance	Balance	Balance

<sup>17</sup>epoxyfunctional dimethylsiloxane

<sup>18</sup>adipic acid/epoxypropyl diethylenetriamine copolymer

<sup>19</sup>polyamine resins

30	<u>Formula</u>	<u>Loss Modulus Difference</u>	<u>Durable Press Grade</u>
		(x 10 <sup>7</sup> Pa)	
	K	5.31	4.5
	L	5.01	4.3
	M	4.76	4.0
35	N	4.37	3.5
	O	4.17	3.5
	P	3.26	3.3
	Q	3.31	3.3
	R <sup>20</sup>	2.48	2.1

40 <sup>20</sup>Magic Sizing® Spray containing Sodium Carboxymethyl Cellulose; Polyethylene Glycol; Silicone; Water and (minors)



### Preparation of Example II

The compositions are prepared as in Example I. The Loss Modulus Difference is determined by applying fixed volume of liquid sample to a fabric swatch, i.e. 100% cotton broadcloth, in a tangential fiber extension geometry and  
5 monitoring the change in the fabric's ability to dampen the applied stress over time as the sample dries on the surface. Measurements are made isothermally at from about 20°C to about 30°C, e.g., room temperature. Loss Modulus, or energy loss, is measured as the fabric dries and is reported as the Loss Modulus Difference (LMD) between the dry fabric at the end of the run and the wet fabric at the beginning of the  
10 run.

An effective amount of the above compositions are placed in a CSI T7500® sprayer and the sprayer is used to treat wrinkled fabrics.


The actives in compositions having a Loss Modulus Difference of from about  $3.3 \times 10^7$  Pascals to about  $5.5 \times 10^7$  Pascals are selected as having acceptable  
15 wrinkle reducing properties.

- 24 -

What is Claimed is:


1. An article of manufacture, which comprises
  - A. a wrinkle reducing composition, comprising:
    1. a wrinkle reducing active selected from the group consisting of,
      - a. an effective amount of silicone;
      - b. an effective amount of film-forming polymer; and
      - c. mixtures thereof; and
    2. a liquid carrier, preferably water; and
  - B. a spray dispensing device, preferably wherein said spray dispensing device is selected from the group consisting of aerosol spray dispensers; self-pressurized, non-aerosol spray dispensers; pump-spray dispensers; and trigger-spray dispensers.; andwherein said wrinkle reducing composition is substantially free of starch, modified starch, and mixtures thereof.
2. The article of manufacture of Claim 1 wherein said wrinkle reducing composition is silicone present at a level of from 0.1% to 4.5%, preferably from 0.2% to 4%, more preferably from 0.3% to 2%, by weight of the composition.
3. The article of manufacture of Claim 1 wherein said wrinkle reducing composition is a film-forming polymer present at a level of from 0.1% to 4.5%, preferably from 0.2% to 3%, more preferably from 0.3% to 2%, by weight of the composition.
4. The article of manufacture of Claim 1 wherein said wrinkle reducing composition is a mixture of silicone and film-forming polymer having a weight ratio of silicone to polymer of from 10:1 to 1:10, preferably from 5:1 to 1:5, more preferably from 2:1 to 1:2.
5. The article of manufacture of Claims 1 and 4 wherein said silicone is selected from the group consisting of polydimethylsiloxane gums and fluids, aminosilicones, reactive silicones and phenylsilicones, preferably wherein said silicone is selected from the group consisting of
  - A. polyalkyl or polyaryl silicones with the following structure:

- 25 -

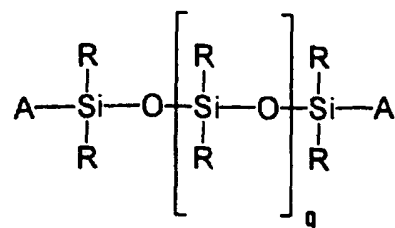

wherein each R is a phenyl, a hydroxy, an alkyl an aryl, or mixtures thereof; q is an integer from about 7 to about 8,000; and each A is hydrogen, methyl, methoxy, ethoxy, hydroxy, propoxy, aryloxy, or mixtures thereof;

B. silicone materials having the formula:

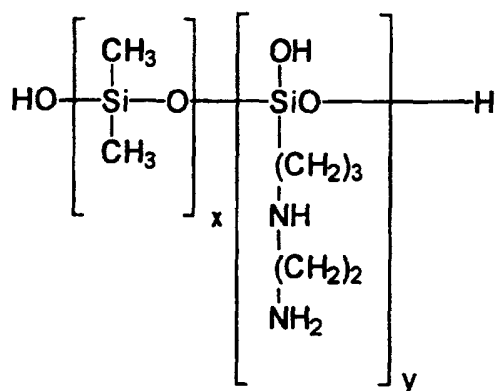

wherein x and y are integers which depend on the molecular weight of the silicone and wherein said silicone has a viscosity of from about 10,000 centistokes to about 500,000 centistokes at 25°C; and

C. mixtures thereof.

6. The article of manufacture of Claims 1 and 4 wherein said film-forming polymer is comprised of monomers selected from the group consisting of adipic acid; ethenyl formamide; diethylene triamine; vinyl amine; acrylic acid; methacrylic acid; N,N-dimethylacrylamide; N-t-butyl acrylamide; maleic acid; maleic anhydride, and its half esters; crotonic acid; itaconic acid; acrylamide; acrylate alcohols; hydroxyethyl methacrylate; vinyl pyrrolidone; vinyl ethers; maleimides; vinyl pyridine; vinyl imidazole and other polar vinyl heterocyclics; styrene sulfonate; allyl alcohol; vinyl alcohol; vinyl caprolactam; acrylic or methacrylic acid esters of C<sub>1</sub>-C<sub>18</sub> alcohols; polystyrene macromer; vinyl acetate; vinyl chloride; vinylidene chloride; vinyl propionate; alpha-methylstyrene; t-butylstyrene; butadiene; cyclohexadiene; ethylene; propylene; vinyl toluene; methoxy ethyl methacrylate; and mixtures thereof, preferably wherein said film-forming polymers are selected from the group consisting of adipic acid / dimethylaminohydroxypropyl

- 26 -

diethylenetriamine copolymer; adipic acid / epoxypropyl diethylenetriamine copolymer; poly(vinylpyrrolidone/dimethylaminoethyl methacrylate); polyvinyl alcohol; polyvinylpyridine n-oxide; methacryloyl ethyl betaine / methacrylates copolymer; ethyl acrylate / methyl methacrylate / methacrylic acid / acrylic acid copolymer; polyamine resins; polyquaternary amine resins; poly(ethyleneformamide); poly(vinylamine) hydrochloride; poly(vinyl alcohol-co-vinylamine); poly(vinyl alcohol-co-6% vinylamine); poly(vinyl alcohol-co-12% vinylamine); poly(vinyl alcohol-co-6% vinylamine hydrochloride); and poly(vinyl alcohol-co-12% vinylamine hydrochloride).

7. The article of manufacture of Claim 6 wherein said film-forming polymer has a glass transition temperature of from  $-20^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ , preferably from  $-10^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ , more preferably from  $0^{\circ}\text{C}$  to  $80^{\circ}\text{C}$ , and preferably wherein said film-forming polymer is soluble, dispersible, or both in water, alcohol, or mixtures thereof, and wherein said film-forming polymer has a molecular weight of at least 500.

8. The article of manufacture of Claim 1 wherein said wrinkle reducing composition further comprises an ethoxylated surfactant, a soil release polymer, and antistatic agent, or mixtures thereof.

9. The method of reducing wrinkles in fabric, which comprises spraying an effective amount of wrinkle reducing composition onto a wrinkled portion of fabric with the article of manufacture of Claim 1, wherein said fabric is not sprayed to saturation and hanging said fabric until it is dry, and preferably wherein said wrinkled portion of said fabric is stretched perpendicular to the wrinkle or smoothed by hand before hanging said fabric, or wherein said fabric is ironed.

10. A process for determining acceptable wrinkle reducing composition mixture, which comprises;

A. using Dynamic Mechanical Analysis, comprising:

1. mounting a swatch of fabric in extensional geometry in a Dynamic Mechanical Analysis apparatus;
2. applying a fixed volume of a liquid sample to said fabric swatch;
3. at a time no greater than 2 minutes,
  - a. read the sample height instrumentally;
  - b. set stress values;

- 27 -

- c. raise furnace;
    - d. allow temperature to equilibrate; and
    - e. begin running said analysis;
  - 4. collecting the data and calculating an average between wet and dry fabric ranges; and
- B. determining whether said wrinkle reducing composition has a Loss Modulus Difference of from  $3.3 \times 10^7$  Pascal to  $5.5 \times 10^7$  Pascal by subtracting the wet region ranges from the dry region ranges.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>D06M 15/643, 23/06, G01N 33/36, 3/00</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 96/15310</b> <b>(43) International Publication Date:</b> 23 May 1996 (23.05.96)
<b>(21) International Application Number:</b> PCT/US95/14033 <b>(22) International Filing Date:</b> 31 October 1995 (31.10.95)  <b>(30) Priority Data:</b> 08/338,314      10 November 1994 (10.11.94)      US  <b>(71) Applicant:</b> THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).  <b>(72) Inventors:</b> VOGEL, Alice, Marie; 6025 Dartford Way, Mid- dletown, OH 45044 (US). WAHL, Errol, Hoffman; 8021 Deersshadow Lane, Cincinnati, OH 45242 (US). CAPPEL, Jerome, Paul; 6356 Terra Court, Cincinnati, OH 45248 (US). WARD, Thomas, Carl; 4756 Susannah Drive, Blacksburg, VA 24060 (US).  <b>(74) Agents:</b> REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).		<b>(81) Designated States:</b> BR, CA, CZ, FI, HU, JP, MX, NO, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>  <b>(88) Date of publication of the international search report:</b> 8 August 1996 (08.08.96)
<b>(54) Title:</b> WRINKLE REDUCING COMPOSITION  <b>(57) Abstract</b>  The present invention relates to a wrinkle reducing composition for use on fabrics, particularly clothing. The composition comprises a wrinkle reducing active, which is made up of an effective amount of silicone and an effective amount of film-forming polymer, and a liquid carrier. The composition is substantially free of starch, modified starch, and mixtures thereof, and results a Loss Modulus Difference of greater than about $3.3 \times 10^7$ Pascal on fabric. The composition can be incorporated into a spray dispenser that can create an article of manufacture that can facilitate treatment of fabric with the wrinkle reducing composition. The wrinkle reducing actives in the composition can be determined through Dynamic Mechanical Analysis using a 100 % cotton broadcloth swatch and a fixed volume of a sample of wrinkle reducing active.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## INTERNATIONAL SEARCH REPORT

Inter. nat. Application No.

PCT/US 95/14033

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 D06M15/643 D06M23/06 G01N33/36 G01N3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D06M G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,2 270 930 (AMWAY CORP) 30 March 1994 see page 2, line 19 - line 26 see page 8, line 31 - page 11, line 24; claims; examples ---	1-9
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 017 (C-675) 16 January 1990 & JP,A,01 260 064 (KA0 CORP) 17 October 1989 see abstract ---	1-9
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 074 (C-0687) 13 February 1990 & JP,A,01 292 184 (KA0 CORP) 24 November 1989 see abstract --- -/--	1,2,9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 April 1996

Date of mailing of the international search report

12 -06- 1996

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

BLAS, V



## INTERNATIONAL SEARCH REPORT

Int. Nat. Application No.  
PCT/US 95/14033

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,91 19037 (PROCTER & GAMBLE) 12 December 1991 see page 2, line 32 - page 3, line 24 see page 4, line 11 - page 8, line 18; claims ---	1,2,9
A	WO,A,87 03682 (HOFFMANN STAERKEFABRIKEN AG) 18 June 1987 see the whole document ---	1-9
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 376 (C-1084) 15 July 1993 & JP,A,05 059 672 (KAO CORP) 9 March 1993 see abstract ---	1-9
P,X	PATENT ABSTRACTS OF JAPAN vol. 950, no. 005 & JP,A,07 119 044 (KAO CORP) 9 May 1995 see abstract -----	1-9

INTERNATIONAL SEARCH REPORT

I( national application No.

PCT/US 95/ 14033

**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

See annex.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-9

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FR M PCT/SA/210**

First subject (searched) : Claims 1 - 9

An article and its use for reducing wrinkles, the article  
being : An article of manufacture comprising :

A) a wrinkle reducing composition comprising :

1) a wrinkle reducing active selected from the group  
consisting of :

a) - effective amount of silicone

b) - effective amount of film forming polymer and

c) - mixtures thereof and

2) a liquid carrier

B) A spray dispensing device.

Second subject (not searched) : Claim 10

A process for determining acceptable wrinkle reducing  
composition mixture.

# INTERNATIONAL SEARCH REPORT

PCT/US 95/14033

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
GB-A-2270930	30-03-94	CA-A-	2106173	24-03-94
		DE-A-	4331892	07-04-94
		JP-A-	6240575	30-08-94
		AU-B-	667233	14-03-96
		AU-B-	4736393	31-03-94
-----				
WO-A-9119037	12-12-91	US-A-	5064543	12-11-91
		US-A-	5062971	05-11-91
		US-A-	5336419	09-08-94
		AU-B-	8057691	31-12-91
		CN-A-	1059001	26-02-92
		EP-A-	0532671	24-03-93
-----				
WO-A-8703682	18-06-87	DE-A-	3542725	04-06-87
		AU-B-	598492	28-06-90
		AU-B-	6584886	04-06-87
		EP-A, B	0230565	05-08-87
		JP-T-	63502362	08-09-88
		US-A-	4818242	04-04-89
-----				